




richtig / right	falsch / wrong

The storage conditions shown in the pictograms refer to standard climate according to DIN 50014 (edition 1985-07).

Abbreviation	Temperature T °C	Humidity U %	Class	Tolerance	
				Temperature T °C	Humidity U %
23/50	23	50	2	+ 2	

When using standard packaging for adhesive labels, the following notes should be observed:

- (1) Removal aid and feeding aid during roll change in labeling machine
- (2) Soft winding possible (prevention of bleeding and clogging of the adhesive)
- (3) Prevention of telescoping of the roll and damage to the liner edges
- (4) Prevention of label abrasion during outward winding
- (6) Pressure distribution in pallet stacking
- (7) Increasing stack stability through core sleeve and avoidance of the cardboard flaps resting on the edges of the backing paper
- (8) Secure positioning of individual rolls during conveyor vibrations

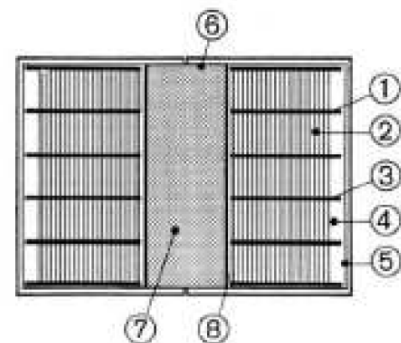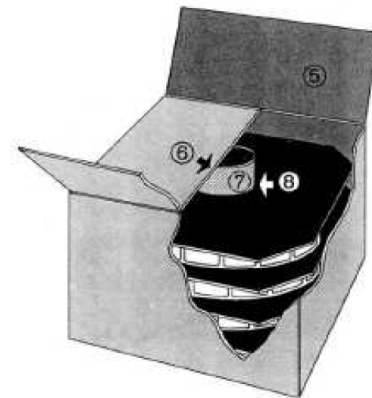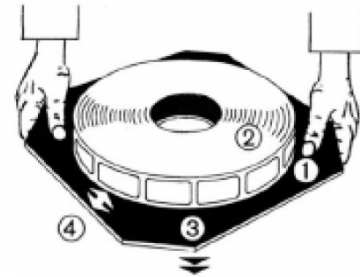

The CCL guideline recommends a shelf life of six months for labels, sleeves and product packaging from the manufacturing date of the products, provided that the recommended storage conditions are respected.